

N8810U-G

Unparalleled Multi-User Performance
for Best-in-Class Value



High-end data centers often need a level of speed that today's average network cannot provide. The 10GbE solution offered by the N8810U-G models makes them ready for the next step in network evolution straight out of the box.



Link aggregation can sustain multiple network connections and provide redundancy in case one of the links fails. Thecus NAS supports 7 modes which provide Load Balance, Failover, 802.3ad, Balance-XOR, Balance-TLB, and Balance-ALB, Broadcast.



Get the most out of your storage space with the extreme speed of iSCSI and the efficiency of iSCSI thin provisioning. Connect through iSCSI for the fastest data transfer speeds available and make wasted disk space a thing of the past with thin provisioning's flexible storage functionality.



Data Guard backup solution is the ultimate software as it provides both local and remote parts. Currently, data is backed up across RAID volumes, external USB drives, and eSATA. In addition, Data Guard uses innovative technology to sync data across the network to other NAS and servers. More importantly, Thecus® Data Guard is the total backup solution which makes managing NAS user-friendly and convenient.



Thecus's AES 256-bit RAID volume encryption tool allows users to fully encrypt their entire RAID volume, defending essential data even in instances of theft.



Make your NAS into the ultimate multimedia hub! The N8810U-G's HDMI output allows you to connect your NAS directly to your TV for device management.



When it comes to data management, Thecus NAS truly let you have it your way. Create multiple RAID volumes each supporting different RAID modes including RAID 0, 1, 5, 6, 10, 50, 60 and JBOD for your own balance of performance and data protection. Should a hard drive malfunction occur, changing one is simple thanks to online RAID migration and expansion, hot spare, and auto rebuild.




Thecus' innovative hardware helps prevent failures. But sometimes you have to protect the NAS against itself. Adding an antivirus to the already comprehensive software bundle will provide the necessary software protection by scanning the files on your NAS and defending it against possible threats. McAfee is the world's largest dedicated security technology company and shares Thecus' spirit of dedication and quality. By establishing a strong partnership with them, Thecus will allow users the benefit of McAfee's powerful software on their NAS entirely for free.

N8810U-G

Specifications

Hardware Platform

- Processor**
- Intel® Pentium G850 (2.9GHz Dual Core)
- System Memory**
- 4GB DDR3 ECC Memory
- LAN Interface**
- RJ-45x2: Intel 82574L 10/100/1000 BASE-TX Auto MDI/MDI-X
 - Supports 1 x Single-Port 10GBASE-T Ethernet Network Card
 - WOL supported
- USB Interface**
- USB 2.0 host port x6 (front x2, back x4)
 - USB 3.0 host port x2 (back x2)
- LCM Module**
- Displays system status and information
- HDMI Output**
- HDMI port (back x1)
- VGA Output**
- VGA port (back x1)
- Disk Interface**
- 8 x SATA for internal
- Power Supply**
- Redundant power supply 400W or more (80plus)
- Bundled 10GbE Network Card**
- 1 x C10GTR Installed
- PCI-e x8 Slot**
- 1
- Thermal/Fan control**
- Thermal sensor on processor temperature
- System Fan**
- Hot Swappable (x4)
- System Clock**
- Battery-backed up system clock
- Power Management**
- Auto power on after shutdown due to power loss
- Buzzer**
- Adjustable frequency alarm
- Buttons**
- Power button
 - LCM button (ENT, ESC, UP, DOWN)
- Environment**
- Temperature: 5°C to 40°C
 - Humidity: 0 ~ 80 % R.H. (Non-condensing)
- Chassis**
- 2U Rack mount
- Dimensions (HxWxD)**
- 90 x 428 x 586 (mm)/3.54 x 16.85 x 23.07 (in)
- Weight**
- 23.29 kgs/51.35 lb
- Certificates**
- CE/FCC/C-Tick/VCCI/BSMI
 - RoHS
 - WEEE
 - VMware

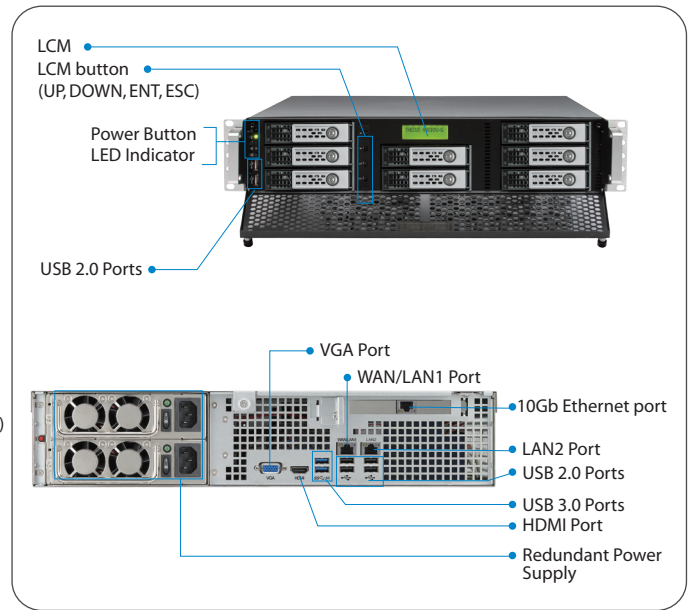

Software Functions

- RAID**
- RAID Modes: RAID 0, 1, 5, 6, 10, 50, 60 and JBOD
 - Auto-rebuild: Supported
 - Hot-swap: Supported
 - Hot Spare: Supported
 - RAID Level Migration: Supported
 - RAID Expansion: Supported
 - RAID Volume Encryption: AES256bit
- Disk**
- Power Management: Available spin-down while idle setting
 - Bad Block Scan: Supported
 - SMART Info: Supported
 - SMART Test: Supported
 - Disk Roaming: Supports volume-based roaming to other Thcus NAS (Require ThcusOS 5 64 bit)
- Network**
- Configuration: Fixed IP address, dynamic IP address
 - Transport Protocols: TCP/IP/Appletalk
 - File Protocols: SMB/CIFS, HTTP/HTTPS, FTP, NFS v4, AFP
 - Link Aggregation: Load balance, Failover, 802.3ad, Balance-XOR, Balance-TLB, Balance-ALB, Broadcast
 - TCP/IP: IPV6 & IPV4
 - DDNS: Supported
 - SSH: Supported
 - UPnP: Supported
 - UPnP Port forwarding: Supported
- System status**
- System Monitor: Monitoring CPU, memory, network utilization and protocols access user count
 - Syslog Management:
 - Send syslog to assigned location
 - Act as syslog server to receive log info from other systems
- Data Access**
- Client OS Support: Windows XP and after, Windows Server 2003 and after, UNIX/Linux, Mac OS X
 - FTP: Built-in FTP server with bandwidth control
 - Secure FTP: Built-in secure FTP server with bandwidth control
 - TFTP: Users can download and upload files with TFTP programs
 - Download Manager: BT download (via Transmission module), NZB download (via NZB module)
 - Printer Server (IPP):
 - Supports USB printers
 - Supports a wide range of IPP printers
 - Client can manage print tasks (list/delete) via web user interface
- Data Backup**
- Client Incremental Data Backup: Acronis True Image (OEM version)
 - Client System Disaster Recovery: Acronis True Image (OEM version)
 - Client Side Backup Software: Thcus Backup Utility (Windows/Mac OS X)
 - Data Burn:
 - Create files to ISO image and burn to optical disc
 - Create files to ISO image
 - Read ISO image from optical disc and write to NAS
 - Mac OS X Time Machine: Supported
 - Data Guard: Remote Backup/Local Backup
- Block Level Access**
- iSCSI Target/Initiator: Supports Microsoft/Mac OS X/Linux initiators and Thcus NAS targets
 - iSCSI Thin Provisioning: Supported
 - MPIO: Supported
 - MCS: Supported
 - Clustering: Supported
 - SCSI3 persistent group reservation: Supported
- Power Management**
- Scheduled Power On/Off: Supported
- Volume Management**
- Multiple RAID: Supported
 - Multiple File System Selectable: EXT3/EXT4/XFS
- Multimedia Support**
- iTunes Server: Supports AAC, MP3 w/ID3 tag and WAV
 - Piczza™ Web Server (via module):
 - Supports GIF, JPG (JPEG), BMP and PNG
 - Supports EXIF display
 - Supports slide show
 - Media Server: Supports uPnP AV streaming protocol (via Module)
- User Authentication**
- Local User: Supports built-in user accounts
 - Local Group: Supports built-in user groups
 - Windows ADS: Supported
 - LDAP: Supported
 - Access Guard: Supports Black & White list/IP Filter
- Cloud Backup**
- DropBox: Supported (via module)
 - ElephantDriver: Supported (via module)
 - Amazon S3: Supported
- File System**
- Type: Journaling File System
 - Language Support: Unicode Support
 - Authorization (ACL): "Read", "write", or "deny" privileges to individual users or groups in folders and sub-folders
- Administration**
- User Quota: Supported
 - User Interface: Web-based user interface supports English, Traditional Chinese, Simplified Chinese, Japanese, Korean, French, German, Italian, Spanish, Russian, Polish and Portuguese.
 - Utility Program: MS Windows Setup Wizard, Supports Windows XP and after, Mac OS X Setup Wizard
 - Email Notifications: Sends system messages via email to the system administrator
 - SNMP Trap: System information trap out
- Mobile Applications (iOS/Android)**
- T-Dashboard™: Mobile monitoring and administration (via module)
 - T-OnTheGo™: Upload, download and stream multimedia
- Data Security**
- Virus Scan: Supports McAfee® (via module)
- Capacity Expansion**
- Stackable: Can extend for 5 additional iSCSI volumes from other Thcus NAS
- Others**
- Recycled Bin: Supported
 - Web Disk: Supported (via module)
 - Web Server: Supported (via module)
 - ISO Mount: Supported
 - IP Cam Surveillance: Supports up to 10 IP cameras (via module)
 - Auto Module Installation: Thcus's module server automatically provides the latest modules and updates through the user interface
 - Local Display: X-Window via HDMI output



D33B79 N11360
*Design and specifications are subject to change without prior notice.

Thecus®, Creator in Storage
www.thecus.com



Thecus® HQ
15F, No.79, Sec. 1, Sintai 5th Rd., Sijhih Dist, New Taipei City 221, Taiwan (R.O.C.)
Email: sales@thecus.com
Facebook: www.facebook.com/Thecus
Forum: forum.thecus.com
Twitter: twitter.com/Thecus_Storage
RSS: www.thecus.com/rss_news.php
Youtube: www.youtube.com/thecusstorage

Thecus® U.S.A., Inc.
487 Montague Expressway, Milpitas, CA 95035, USA
Email: support@us.thecus.com
Tech support: ussupport.thecus.com/esupport

Thecus® NL B.V.
Marinus Dammeweg 7, 5928 PW Venlo, the Netherlands
Email: thecus_nl@thecus.com
Tech support: esupport.thecus-eu.com
Support e-mail: support_nl@thecus.com

Thecus® Germany
Siemensstr. 17, 76275 Ettlingen
Email: support@thecus-service.de
Tech support: esupport.thecus-eu.com