



10-Port 48VDC Adjustable Smart PoE Unmanaged Switch

WIS-SG910P

WISNETWORKS TECHNOLOGIES CO., LTD.

Address: No.77, FuTe West 3 Road, China (Shanghai) Pilot Free Trade Zone

E-mail: info@wisnetworks.com Web: www.wisnetworks.com

Version 1.0


Product Overview

Adopt standard 802.3at/802.3af power supply protocols , compatible with IEEE802.3af / IEEE802.3at.CCTV/Vlan/Default optional by sliding a simply switch on the front panel to meet different scene request.

Features

Gigabit PoE

- Apply to 802.11ac series wisnetworks products
- Seamlessly working with 5GHz backhaul and base station etc.

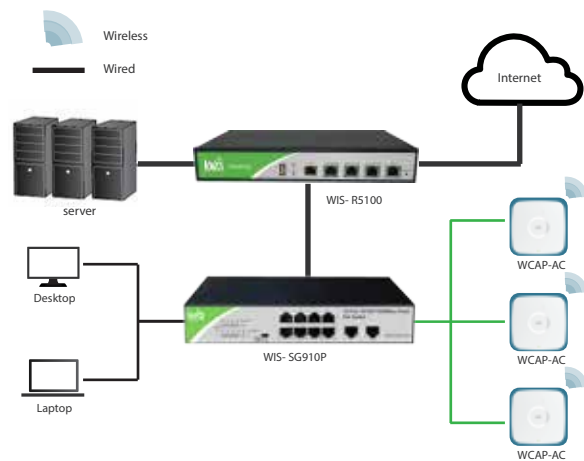


Extremely Wide Voltage Scale


- Adjustable 48V Output
- Support 802.3at/802.3af
- Compatible with all PoE device
- Up to 250 meters PoE length

Dual Uplink Ports

- Adapt to complex networking status
- Support for multi-switch cascading

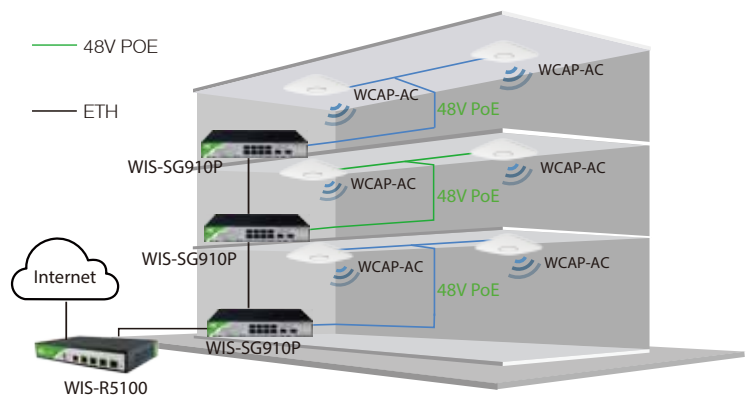

Network Topology

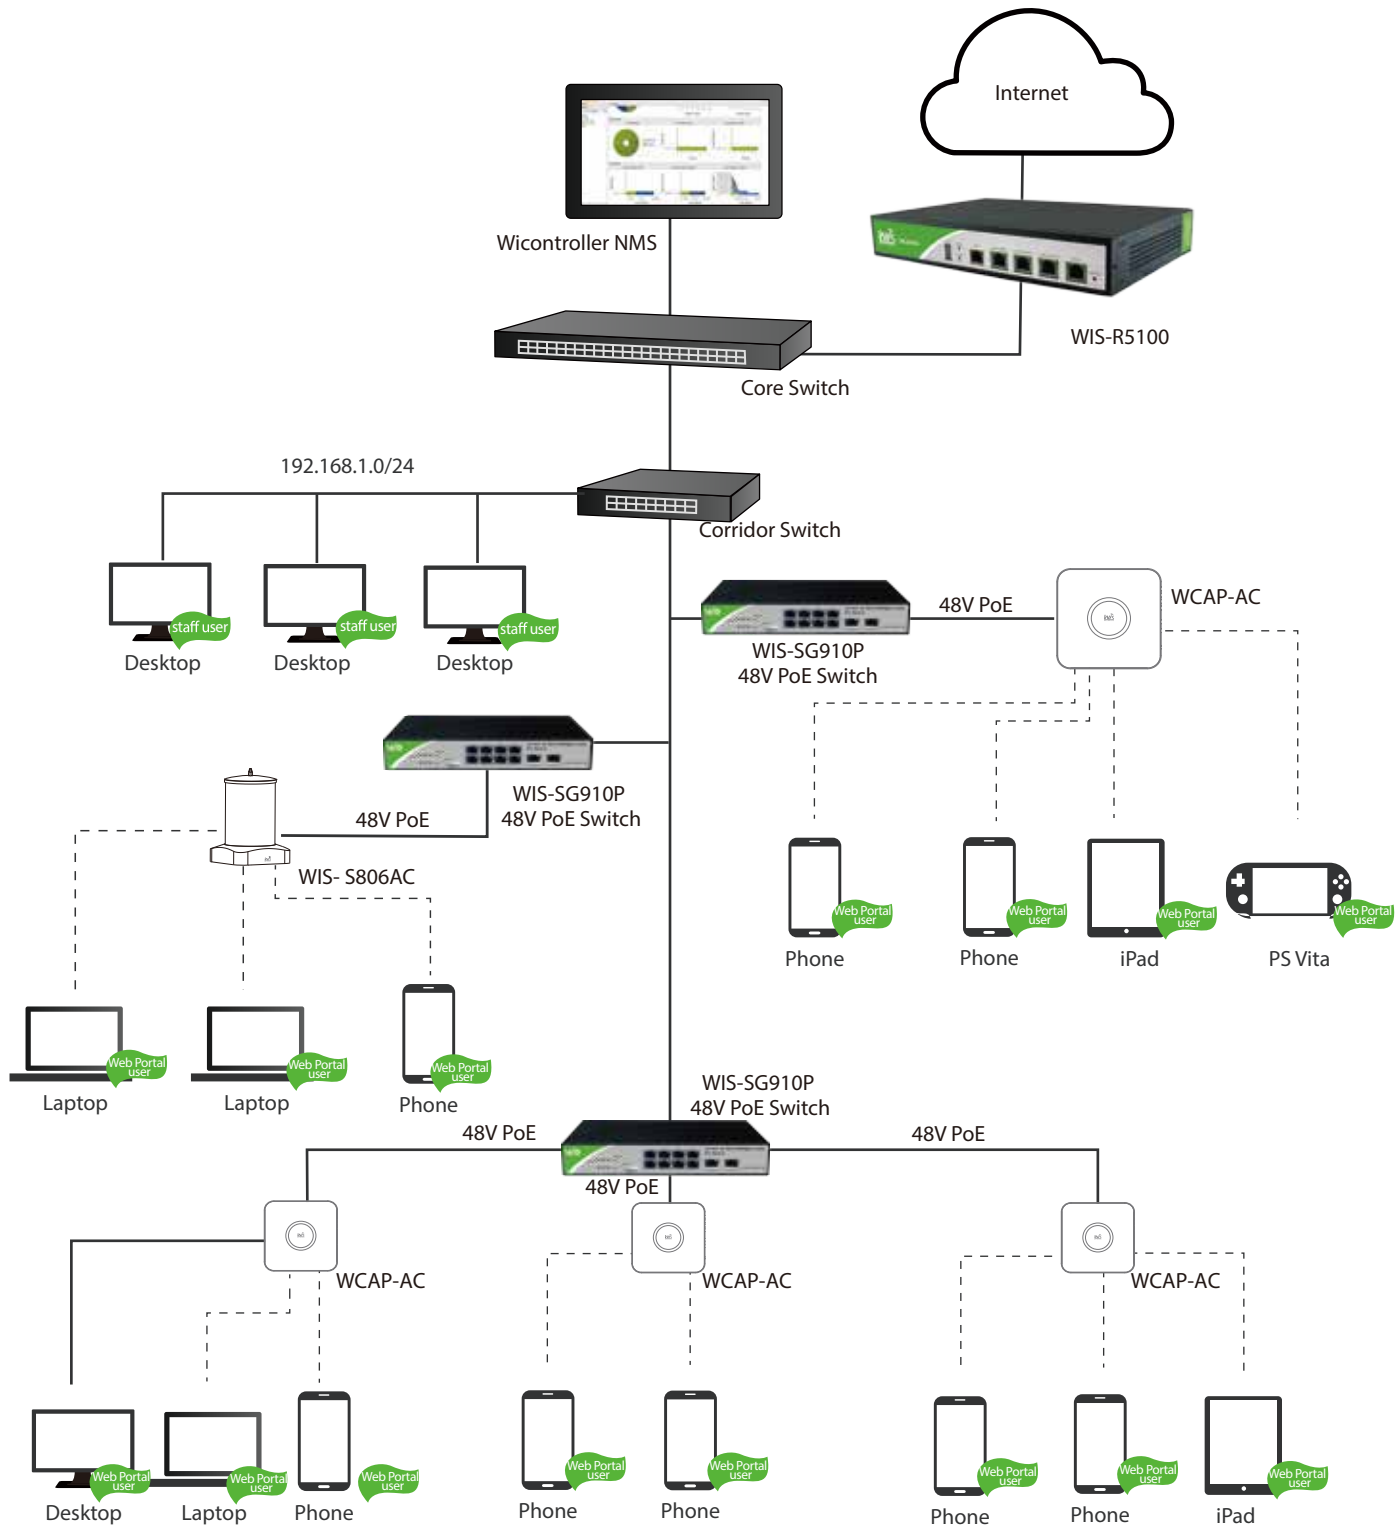

SPECIFICATION

Model	- WIS-SG910P
Ports	- 10x10/100/1000Mbps auto-negotiation RJ45 port
PoE Ports	- 1~8
PoE Method	- 1/2 (+) 3/6 (-)
PoE Output	- DC: 48V
PoE Power	- 120W
Forward Type	- Store and forward
Capacity	- 20G
MAC Table	- 8K, Auto-learning, Auto-aging
Jumbo Frame	- 9KB
PPS	- 14.88Mpps
Input Voltage	- AC 100-240V 50-60Hz
Working Temperature	- 0℃~40℃
Storage Temperature	- -40℃~70℃
Working Humidity	- 10%~90% RH non-condensing
Storage Humidity	- 5%~90% RH non-condensing
Dimension	- 220*150*44mm
Weight	- 1.0kg
LED	- PWR, Supply Voltage Indicator, PoE usage light, LNK/ACT, PoE
Cable	- 10BASE-T: UTP category 3,4, 5 cable (≤100m) - 100BASE-TX: UTP category 5 cable (≤100m) - 1000BASE-TX: UTP category 5e cable (≤100m)

Related Products

WIS-R5100



WCAP-AC



WIS-L713AC