

Data Sheet



QSAN Unified Storage

XCubeNXT 8026D

Best Unified Storage for Hybrid Flash

Key Benefits

Fast

- Switching to hybrid flash mode meets the maximum performance.
- Hybrid SSD cache provides read/write cache and boost speed.
- Support 16/32Gb Fibre channel and 10/25GbE host card.
- Network load optimization, select the best path to reach the best speed for your workload automatically.

Enterprise-Grade

- Protect against ransomware and cyber-attack by WORM, SED, and Pool encryption.
- XMirror can sync your data among branch offices, build up an enterprise private cloud.
- Built-in various enterprise feature helps you to store your data more efficiently and save capacity.
- Built-in enterprise data services for all workloads.
- Memory cache protection ensure that data will not be lost in a power failure.

Scalable

- Support up to 612bays, you don't have to re-buy storage just for expansion.
- Scale-out everything instantly includes generational upgrades.

Enterprise-Level Unified Storage For Business Environments

QSAN XN8026D is the most cost-effective hybrid-flash dual controller unified storage for the SMB market. It provides a proven 99.9999% availability, high-speed performance, non-disruptive upgrades, and maintenance, completely improves the enterprise operating efficiency, and allows you to prevent the loss of service downtime and data transmission latency.

Hybrid Flash Mode

The most effective solution to gaining high performance for applications that are slowed down is switching to hybrid flash. A primary advantage of the hybrid flash is consistently high performance. Predictable performance helps you to consolidate many workloads on systems without compromising performance.

Faster Storage Easier Configuration

XN8012D provides many tools to accelerate application execution efficiency which are very simple to use.

- **Intuitive load balancing**- Automatically select the right path that fits your current workload.
- **Application efficiency**- Support 16GbE/32GbE Fibre channel and 25GbE/32GbE provide different application scenarios.
- **Smart SSD cache**- One SSD to provide both read and write cache to achieve cost-efficiency without compromising performance.
- **Intuitive load balancing**- Automatically select the right path that fits your current workload.


Enterprise Function

Secured, centralized repository and storage efficiency for business information.

- **Protect against ransomware and cyber attack**- Complete support for block and file-level transmission protection and self-encrypting drives (SED), and use WORM and military-grade AES 256 pool encryption technology to protect your data.
- **Enterprise private cloud**- XMirror to sync your data among branches office, break geology limitation, and have files accessible just like in the same cloud.
- **Deduplication**- With deduplication, QSM will auto remove the redundant data object to reduce the usage of storage capacity.
- **Compression**- Helping ITs to reduce the amount of storage you need to purchase and maintain.

The QSAN logo consists of the word "QSAN" in a bold, white, sans-serif font, centered within a dark teal rectangular background.

Appearance

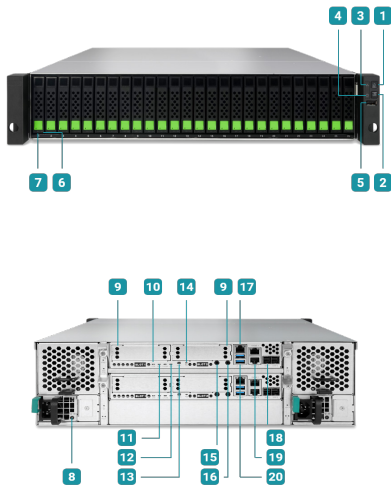

1. Enclosure Power Button / LED
2. UID (Unique Identifier) Button / LED
3. Enclosure Access LED
4. Enclosure Status LED
5. USB Port
6. Disk Drive Power LED
7. Disk Drive Status LED
8. PSU Indicator and Beep Off Button
9. Controller Status LED
10. Master / Slave LED (only for dual controllers)
11. Dirty Cache LED
12. UID (Unique Identifier) LED
13. Host Card Slot 1 (host card is an optional part)
14. Host Card Slot 2 (host card is an optional part)
15. Buzzer Mute Button
16. Reset to Factory Default Button
17. Management Port
18. Console Port
19. Service Port
20. USB Port
21. 10GbE iSCSI Port
22. 12Gb/s SAS Wide Port

System Spec

Architecture	Active-Active dual-controller
CPU	Intel® Xeon® 64-bit Quad-Core (Also support 8 core model)
Memory	
System Flash	16GB USB DOM
Memory Module Pre-installed	16GB DDR4 ECC DIMM (per controller)
Memory Expandable up to	4 x 32 = 128GB (per controller)
Storage	
Drive Bays	2.5" Slot x 26
Maximum Drive Bays with Expansion Unit	612
Compatible Drive Type	2.5" SATA SSD / SATA SED SSD (*), 2.5" SAS HDD / SAS SED HDD, 2.5" NL-SAS HDD / NL-SAS SED HDD (* In dual-controller system, 2.5"SATA HDD need 6G MUX board)
Drive Interface	SAS 12Gb/s
Maximum Internal Raw Capacity	399TB
Maximum Raw Capacity with Expansion Units	8,799TB
Hot Swappable Drive	Yes
Connective port	
USB 2.0 Port	1 (Front)
USB 3.0 Port	2 (Rear)
Others	UPS Port x 1, Controller port x 1
1GbE RJ45 LAN Port	1 (Onboard)
10GbE RJ45 LAN Port	2 (Onboard) / 2 iSCSI (Option: HQ-10G2T)
10GbE SFP+ LAN Port	4 iSCSI (Option: HQ-10G4S2)
25GbE SFP28 LAN Port	2 iSCSI (Option: RHCE25P2) (Available soon)
16Gb SFP+ Fibre Channel	4 FCP (Option: HQ-16F4S2) / 2 FCP (Option: HQ-16F2S2)
32Gb SFP28 Fibre Channel	2 FCP (Option: RHCF32P2) (Available soon)
Expansion Port	
12Gb/s SAS Wide Port	2 (onboard)
PCIe Expansion	1 x Gen3x8, 1 x Gen2x4
Function	
Max Pools	4 (Recommendation)
Max LUN	4096
Max LUN Size	Unlimited (Depends on pool size)
Max Snapshot	4096
Security	SED, WORM, Pool Encryption
Support Protocols	FC, iSCSI, NFS, CIFS, FTP
Deduplication	Yes
Compression	Yes
SSD Cache	Yes (Read/Write in 1 SSD)
Virtualization	Hyper-V, VMware ready, VAAI, SRM, Citrix
Cache-to-Flash Module	Yes (Does not need Battery Backup Module)
Others	
System Fan	4 pcs(hot-swappable)
Power Recovery	Yes
Wake on LAN/WAN	Yes
Certification	CE, FCC, CCC, BSMI, VCCI, KCC
Standard warranty	3 years