



OVERVIEW

The **S0802** is a full gigabit L2+ managed Ethernet fiber switch independently developed by **XENTINO**. It has 8*10/100/1000Base-T RJ45 ports and 2*100/1000Base-X SFP fiber slot ports. Each port can support wire-speed forwarding.

The **S0802** has the L2+ full network management, supports IPV4 management, static route full line rate forwarding, complete security protection mechanism, ACL/QoS policy and rich VLAN functions, and is easy to manage and maintain. Supports multiple network redundancy protocols STP/RSTP/MSTP (<50ms) to improve link backup and network reliability. When one-way network fails, communication can be quickly restored to ensure important Uninterrupted communication for applications. According to the actual application requirements, you can configure multiple application services such as port traffic control, VLAN division, and SNMP through the Web network management mode. It satisfies high-density network application environment and is suitable for medium, large-scale scenes such as hotel, campus, park, shopping mall, scenic spot, hospital, bank to form an economical, efficient and reliable communication network.

FEATURES

❖ Gigabit access, Gigabit SFP fiber port uplink

- All series support “Gigabit Ethernet port and Gigabit SFP port” combination, which enables users to flexibly build networking to meet the needs of various scenarios.
- Support non-blocking wire-speed forwarding.
- Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

❖ Security

- 802.1X authentication.
- Port isolation, Storm control.
- IP-MAC-VLAN-Port binding.

❖ Strong business processing capability

- IEEE802.1Q VLAN, flexible VLAN division and QinQ configuration.
- QoS, Priority mode based on 802.1P, Port & DSCP, queue scheduling algorithm including Equ, SP, WRR & SP+WRR.
- ALC, filter data packet through configuring matching rules, processing operation & time permission, and provide flexible and safe access control.
- IGMP V1/V2 and IGMP Snooping.
- ERPS/STP/RSTP/MSTP.
- Static and dynamic aggregation.

❖ Stable and reliable

- CCC, CE, FCC, RoHS.
- Low power consumption, galvanized steel casing, The fan active cooling.
- Self-developed power supply, high redundancy design, providing a long term and stable power output.
- The user-friendly panel, it can show the device status through the LED indicator of PWR, Link .

❖ Easy operation and maintenance management

- Web management, CLI command line (Console, Telnet), SNMP (V1/V2/V3).
- HTTPS, SSLV3, and SSHV1/V2.
- RMON, system log, LLDP, and port traffic statistics.
- CPU monitoring, memory monitoring, Ping test, and cable diagnose.


TECHNICAL SPECIFICATION

XENTINO S0802	
Interface Characteristics	
Fixed Port	8*10/100/1000Base-T RJ45 ports (Data) 2*100/1000Base-X uplink SFP slot ports (Data) 1 * RS232 console port(115200,N,8,1)
Ethernet Port	Port 1-8 support 10/100/1000Base-T(X) auto-sensing, full/half duplex MDI/MDI-X self-adaption
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)
SFP Slot Port	Gigabit SFP optical fiber interface, default matching optical modules (optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC)
Optical Cable / Distance	Multi mode: 850nm 0 ~ 550M, single mode: 1310nm 0 ~ 40KM, 1550nm 0 ~ 120KM.
Chip Parameter	
Network Management Type	L2+
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T, IEEE802.3z 1000Base-X, IEEE802.3x
Forwarding Mode	Store and Forward(Full Wire Speed)
Switching Capacity	16Gbps
Forwarding Rate	14.88Mpps (@64byte)
MAC	8K
Buffer Memory	4.1M
Jumbo Frame	10K
CPU(Hz)	500M
DRAM	1G
Flash	128M
Reset Switch	Yes, One-button factory reset
PoE & Power Supply	

Total PWR / Input Voltage	30W (AC100-240V)
Power Consumption	Built-in power supply, AC 100~240V 50-60Hz 0.56A
Power Supply	Built-in power supply, AC 100~240V 50-60Hz 0.56A
Physical Parameter	
Operation TEMP / Humidity	-20~+55°C, 5%~90% RH Non condensing
Storage TEMP / Humidity	-40~+75°C, 5%~95% RH Non condensing
Dimension	270*181*44.5mm (L*W*H)
Net /Gross Weight	<1.2kg / <1.7kg
Form Factor	Desktop, 19 inch 1U cabinet
Certification & Warranty	
Lightning Protection / Protection Level	Lightning protection: 6KV 8/20us, Protection level: IP30
Certification	CCC, CE mark, commercial, CE/LVD EN60950, FCC Part 15 Class B, RoHS
Warranty	3 years, lifelong maintenance.
Network Management Features	
Interface	IEEE802.3X (Full-duplex) Broadcast storm control based on port speed The speed limit of the message flow in the access port. The minimum particle size is 64Kbps. Port temperature protection setting Port green Ethernet Energy-saving setting
Layer 3 Features	L2+ Network management, IPV4/IPV6 management Static route, Default route @ 128 pcs, APR @ 1024 pcs
VLAN	4K VLAN based on port, IEEE802.1q VLAN based on the protocol VLAN based on MAC QinQ configuration Port configuration of Access, Trunk, Hybrid
Port Aggregation	LACP, Static aggregation Max 5 aggregation groups and 8 ports per group.
Spanning Tree	STP (IEEE802.1d),RSTP (IEEE802.1w),MSTP (IEEE802.1s)
Multicast	IGMP Snooping v1/v2, Max 1024 multicast groups, Fast log out MLD Snooping v1/v2,Multicast VLAN
Port Mirroring	Bidirectional data mirroring based on port
QoS	Diff-Serv QoS,Priority Mark/Remark 8*Output queues of each port 802.1p/DSCP priority mapping Queue Scheduling Algorithm (SP, WRR, SP+WRR) Flow-based Packet Filtering Flow-based Redirection Flow-based Rate Limiting
DHCP	DHCP Client,DHCP Snooping,DHCP Server,DHCP Relay


ACL	L2 to L4 packet filtering, matching first 80 bytes message. Provide ACL based on MAC, Destination MAC address, IP Source, Destination IP, IP Protocol Type, TCP/UDP Port, TCP/UDP Port Range, and VLAN, etc. Port-based Issuing ACL. ACL based on port and VLAN
Security	User hierarchical management and password protection SSH 2.0, SSL, Port isolation, ARP message speed limit Broadcast storm control, Backup for host datum IEEE802.1X & MAC address authentication Mac black holes, IP source protection AAA & RADIUS, MAC learning limit ARP inspection, Anti-DoS attack IP-MAC-VLAN-Port binding
Management	Console/AUX Modem/Telnet/SSH2.0 CLI Web Management (HTTPS) Download & Management on FTP, TFTP, Xmodem, SFTP, SNMP V1/V2C/V3, One-key recovery NTP, System work log, Ping Test, Cable Diagnose, LLDP CPU instant utilization status view
System	Web browser: Mozilla Firefox 2.5 or higher, Google browser chrome V42 or higher, Microsoft Internet Explorer10 or later; Category 5 Ethernet network cable TCP/IP, network adapter, and network operating system (such as Microsoft Windows, Linux, or Mac OS X) installed on each computer in a network

DIMENSION

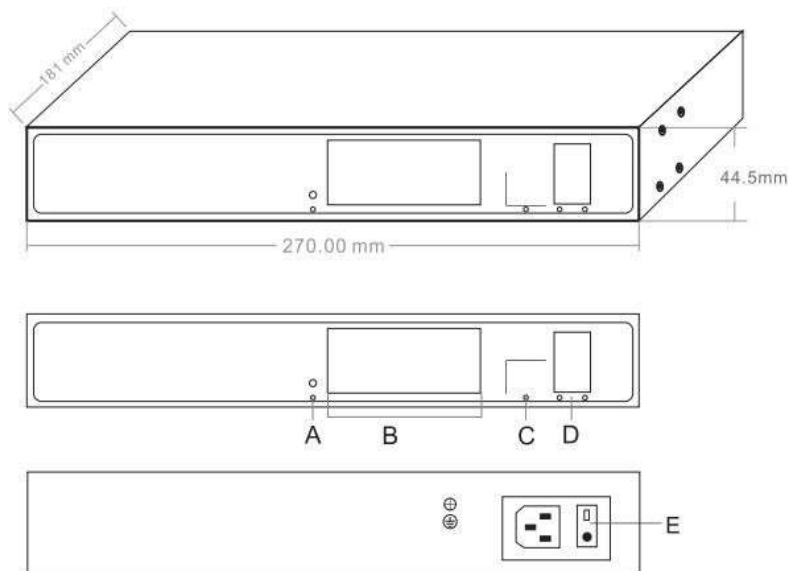

- A. Working Indicator
- B. 8*10/100/1000M Ethernet Ports
- C. Console Port
- D. 2*100/1000M SFP Ports
- E. Power Input Port 100-240V AC, 50/60Hz

APPLICATION

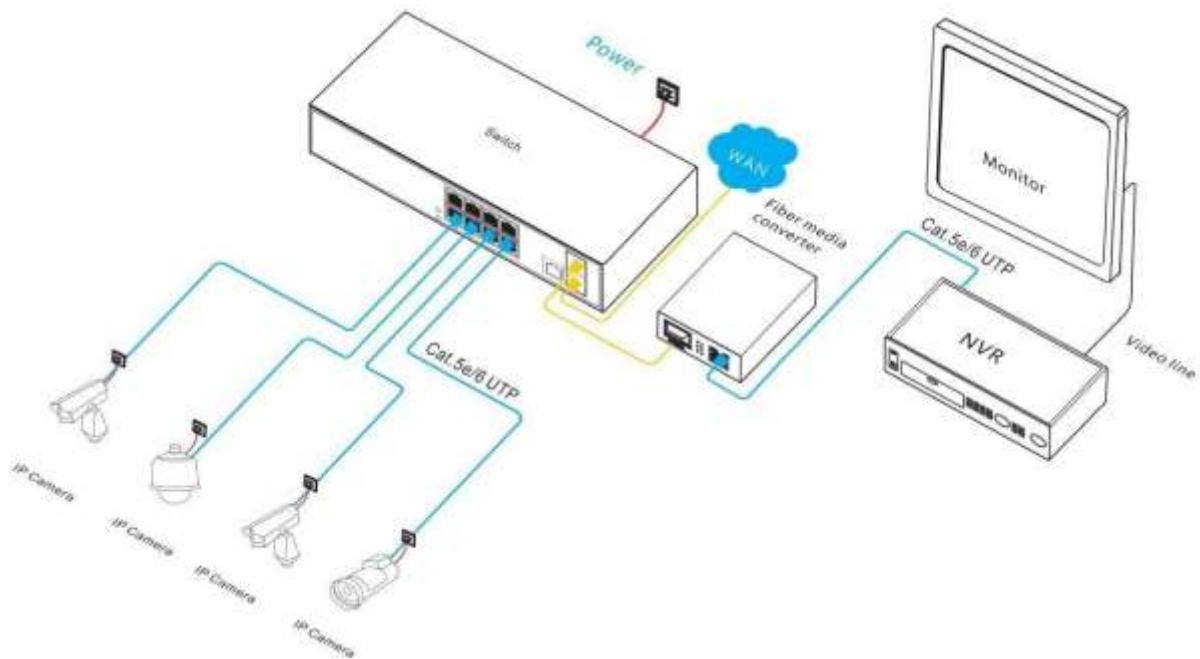

ORDERING INFORMATION

Model	Description
S0802	L2+ managed Ethernet fiber switch with 8* 10/100/1000M RJ45 ports and 2*100/1000M SFP fiber slot ports, Built-in 30W power supply. Support 1U/19 inch rack installation.

PACKAGE CONTENT

QTY	UNIT	CONTENT
1	SET	10-port full gigabit managed Ethernet switch
1	PC	RJ45-DB9 Line
1	PC	AC Power Cable
1	SET	Mounting Kits(Hanging Ear)
1	PC	User Guide
1	PC	Warranty Card